

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 June 2005 (16.06.2005)

PCT

(10) International Publication Number
WO 2005/054583 A1

(51) International Patent Classification⁷: **E01F 15/00**,
9/011

(21) International Application Number:
PCT/NO2004/000368

(22) International Filing Date:
30 November 2004 (30.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20035337 1 December 2003 (01.12.2003) NO

(71) Applicant and

(72) Inventor: **LOTSBERG, Ragnar** [NO/NO]; N-6777
Staarheim (NO).

(74) Agent: **CURO AS**; Box 38, N-7231 Lundamo (NO).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **TRAFFIC CRASH ABSORBER**

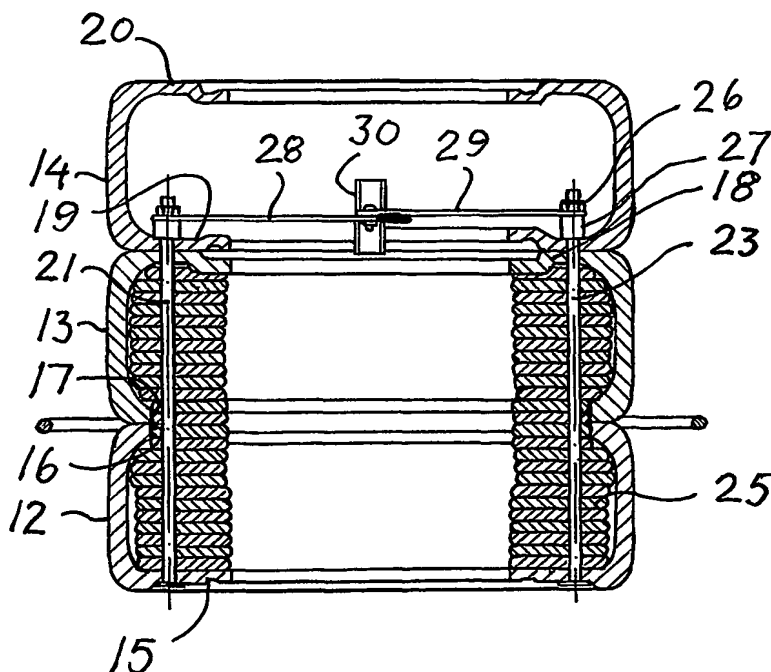

(57) Abstract: Traffic crash absorber (11) containing several vehicle tires, at least approximately coaxial to a geographic axis, above each other and connected in a stack. Connection bolts (21-24) which extend in an axial direction are arranged between the lower and the upper tire, to hold the traffic crash absorber together. The absorption properties and the possibility for a secure linkup of several such traffic crash absorbers can be improved by at least two of the lower vehicle tires (12, 13) in the stack having extended openings (16, 17), to form a chamber comprising more than one tire width, and that in the void between the remaining tire sides (15, 19) are provided annular filling elements (25) which have generally sideways holes for the connection bolts, so that in a compressed state, form an annular cushion, and at least one of the connection bolts (21-24) forms a fastening for a connection element (32) for connection of several traffic crash absorbers.